


# Radiator® Carrier Module

Installation and reference manual for Radiator® Carrier Module 1.5. Last revised on January 11, 2019

Copyright © 2016-2018 Open System Consultants Pty. Ltd.

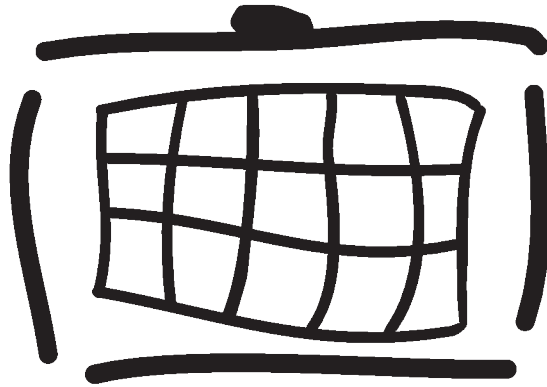

# Radiator

---

# Table of Contents

1. Introduction to Radiator Carrier Module .....	1
2. Installing Radiator Carrier Module .....	1
2.1. Prerequisites .....	1
2.2. Installation .....	1
3. Configuring Diameter peers .....	2
3.1. <DiaPeerDef attribute=value,attribute=value,...> .....	2
3.1.1. Identifier .....	2
3.1.2. Initiator .....	2
3.1.3. AddToRequestFromDia .....	3
3.1.4. PreHandlerHook .....	3
3.1.5. NoReplyHook .....	3
3.1.6. NoreplyTimeout .....	3
3.1.7. ProductName .....	3
3.1.8. OriginHost .....	3
3.1.9. OriginRealm .....	3
3.1.10. DestinationHost .....	3
3.1.11. DestinationRealm .....	3
3.1.12. LocalAddress .....	4
3.1.13. LocalPort .....	4
3.1.14. SupportedVendorIds .....	4
3.1.15. AcctApplicationIds .....	4
3.1.16. VendorAuthApplicationIds .....	4
3.1.17. VendorAcctApplicationIds .....	4
3.1.18. Peer .....	5
3.1.19. Port .....	5
3.1.20. Protocol .....	5
3.1.21. TLS_* .....	5
4. Configuring DIAMETER server .....	5
4.1. <ServerDIAMETERTelco> .....	5
4.1.1. Peer .....	5
4.1.2. Port .....	5
4.1.3. BindAddress .....	5
4.1.4. MaxBufferSize .....	6
4.1.5. Protocol .....	6
4.1.6. ReadTimeOut .....	6
4.1.7. TLS_* .....	6
5. Configuring Diameter relay .....	6
5.1. <AuthBy DiaRelay> .....	6
5.1.1. Identifier .....	6
5.1.2. DiaPeerDef .....	6

---

6. Configuring <MessageLog FILECARRIER> .....	7
6.1. Filename .....	7
6.2. Format .....	7
7. Configuring EIR .....	7
7.1. <AuthBy DiaEIR> .....	7
7.1.1. DiaEIR .....	7
7.1.2. MakeAnswer .....	7
7.1.3. EIR_UnknownAction .....	7
7.1.4. EIR_AttributesHook .....	7
7.1.5. IMEIAttribute .....	8
7.1.6. SoftwareVersionAttribute .....	8
7.1.7. IMSIAttribute .....	8
7.2. <DiaEIR> .....	8
7.2.1. Identifier .....	8
7.2.2. DiaPeerDef .....	8
7.2.3. EIRCache .....	8
7.3. <EIRCacheInternal> .....	8
7.3.1. Identifier .....	8
7.3.2. CacheTimeout .....	8
7.3.3. NegativeCacheTimeout .....	9
7.4. <ServerDiaEIR> .....	9
7.4.1. VendorAuthApplicationIds .....	9
8. Configuring <ServerDHCP> .....	9
8.1. UsernameOption .....	9
8.2. DefaultUsername .....	9
8.3. DHCPyiaddrAttr .....	9
8.4. DHCPSubnetMaskAttr .....	10
8.5. DefaultDHCPSubnetMask .....	10
8.6. DHCPRouterAttr .....	10
8.7. DHCPDomainServerAttr .....	10
8.8. DHCPAddressTimeAttr .....	10
8.9. DefaultDHCPAddressTime .....	10
8.10. DHCPClientIdentifier .....	10
9. <AuthBy DiaINTERNAL> .....	10
9.1. DefaultResult .....	11
9.2. AuthResult .....	11
9.3. AcctResult .....	11
10. Using VSA framework for customised attributes .....	11
11. Abbreviations .....	12

# 1. Introduction to Radiator Carrier Module

---

This document describes how to install and configure Radiator Carrier Module.

Radiator Carrier Module is designed especially for carrier use. It includes the following functionalities:

- Radiator AAA Server Software, for more information, see [Product specifications \[http://open.com.au/radiator/technical.html\]](http://open.com.au/radiator/technical.html)
- Advanced Radiator Diameter Client and Server Software with `<DiaPeerDef>` and `<ServerDIAMETERTelco>`
- Diameter relay application with `<AuthBy DiaRelay>`
- General support for [EIR \(Equipment Identity Register\)](#), EIR client with `<AuthBy DiaEIR>` and test EIR server with `<ServerDiaEIR>`

With these features, Radiator Carrier Module provides all the essential functionalities needed for carrier-class AAA server software. Radiator Carrier Module provides also the base platform for other Radiator carrier-class components, they can be added on the top of Radiator Carrier Module. These components provide functionalities for several different use cases, such as Wi-Fi offloading and VoWiFi with Radiator SIM Module or VoLTE authentication with Radiator GBA/BSF Module.

## 2. Installing Radiator Carrier Module

---

This section the describes how to install Radiator Carrier Module.

### 2.1. Prerequisites

---

You need Radiator 4.17 or later for installing Radiator Carrier Module. If you need to use VSA modules or ServerDHCP added in Radiator Carrier Module 1.3, you need Radiator 4.19 + patches or later. SCTP multihoming support requires Radiator 4.22 and Radiator Radius::UtilXS Perl module .The possible updates to the prerequisites are listed on [Radiator Carrier Module downloads \[https://open.com.au/carrier/downloads.html\]](https://open.com.au/carrier/downloads.html) (login required). For more information on Radiator, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf).

### 2.2. Installation

---

#### Procedure

To install Radiator Carrier Module:

1. Download the Radiator Carrier Module distribution.
2. Unpack the file into a separate working directory.
3. Move to the distribution directory.
4. Prepare the distribution for installation.

```
perl Makefile.PL
```

5. Run the installation. You may need the root access rights for running this command.

```
make install
```

6. Set Radiator to start automatically when booting. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf).

## 3. Configuring Diameter peers

---

Diameter peer configuration is required by the Diameter applications Radiator supports. Diameter applications and `<ServerDIAMETERTelco>` need peer definitions to work properly

All Diameter peers a Radiator instance talks to, must have a matching `DiaPeerDef` clause. A `DiaPeerDef` clause defines what is advertised to the peer, which applications are supported for the peer and if Radiator should actively open connections to the peer instead of waiting for a connection from the peer.

You can configure a single instance of Radiator to support, for example, relaying requests from some peers and processing the requests locally by the other peers.

You can configure Radiator to advertise certain applications to certain peers. The peer definition also determines if Radiator should act as an initiator and establish a connection to the peer. Alternatively Radiator can act as a responder waiting for the peer connection. It is possible to configure Radiator as an initiator for some peer connections and responder for the others.

A `<ServerDIAMETERTelco>` clause is required to create a listen socket for the incoming Diameter peer connections.

### 3.1. `<DiaPeerDef attribute=value,attribute=value,...>`

---

A `DiaPeerDef` clause defines describes and defines a Diameter peer this Radiator instance connects to. The connection can be initiated by Radiator or the peer.

A minimal Radiator policy and charging support configuration requires one `DiaPeerDef` clause in addition to any `AuthBy DiaPCRF, DiaPCEF, DiaRelay` or other Diameter based `AuthBys`. When there is no `ServerDIAMETERTelco` clause, the `DiaPeerDef` clauses must be configured with the `Initiator` flag to connect to the Diameter peers.

A `ServerDIAMETERTelco` clause allows accepting incoming Diameter connections. When a `ServerDIAMETERTelco` is configured, Radiator will act as a Diameter responder. The settings for the connecting peers are looked up from `DiaPeerDef` clauses. The clauses are matched against the incoming `CER` (Capabilities Exchange Request) from the peer.

#### Note

At least one `DiaPeerDef` clause is always required.

If a `ServerDIAMETERTelco` clause is configured but there are no `DiaPeerDef` clauses, the incoming `CER` messages are rejected by Radiator. A `DiaPeerDef` is required to form a successful `CEA` (Capabilities Exchange Answer) back to the peer.

#### Note

A `DiaPeerDef` with an empty attribute list matches any Diameter peer. This can be useful to define default settings for incoming connections from Diameter peers.

#### 3.1.1. Identifier

---

This is an optional parameter, which defines the name of the specific `<DiaPeerDef>` clause and its configuration.

#### 3.1.2. Initiator

---

This is an optional flag, which defines if the Radiator instance can act as a connection initiator. It is not set by default.

*Initiator* must be set if Radiator instance has to act as an initiator and create a connection to the Diameter peer defined by this *<DiaPeerDef>*. If *Initiator* is not set, the Radiator instance does not initiate connections but other instances, such as ePDG (Evolved Packet Data Gateway), must act as an initiator.

---

### 3.1.3. AddToRequestFromDia

---

This parameter defines the Diameter attributes, which are added to a request object in addition with *OriginHost* on page 3 and *OriginRealm* on page 3. The request object is created when a Diameter request message is received. The request object is then sent to the handler with the correct application AuthBy for this request.

---

### 3.1.4. PreHandlerHook

---

This is an optional parameter, which defines the Perl function that is called before the request object is sent to the handlers. The only passed argument is the reference to the current request object.

---

### 3.1.5. NoReplyHook

---

This is an optional parameter, which defines the Perl function that is called if no reply is received from any Diameter peer.

---

### 3.1.6. NoreplyTimeout

---

This integer defines how soon, in seconds, *NoReplyHook* on page 3 is called if the request stored in proxy does not receive a reply. The default value is 5.

---

### 3.1.7. ProductName

---

This is an optional parameter, which defines the name of the specific Diameter peer. If defined, it is sent to the other Diameter peers within the CER and CEA messages. The default value is **Radiator**.

---

### 3.1.8. OriginHost

---

This string defines the name that *<ServerDIAMETERTelco>* uses to identify itself to the Diameter peers. It is sent to the Diameter peers in the Diameter CER and CEA messages. The Diameter peers use *OriginHost* to determine whether they have connected to the correct peer. *OriginHost* must be specified.

---

### 3.1.9. OriginRealm

---

This string defines the name of the Realm the *<ServerDIAMETERTelco>* uses. It is sent to the Diameter peers in the CER and CEA messages. The peer uses it to determine which requests are routed to this Radiator instance. *OriginRealm* must be specified.

---

### 3.1.10. DestinationHost

---

This string defines the value for *Destination-Host* for Diameter requests. The usage of this parameter depends on the Diameter application that uses this *<DiaPeerDef>*. This is an optional parameter.

---

### 3.1.11. DestinationRealm

---

This string defines the value for *Destination-Realm* for Diameter requests. The usage of this parameter depends on the Diameter application that uses this *<DiaPeerDef>*. This is an optional parameter.

### 3.1.12. LocalAddress

---

Using this parameter requires Radiator 4.16 with patches or newer version of Radiator. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf) under section <AuthBy RADSEC>.

### 3.1.13. LocalPort

---

Using this parameter requires Radiator 4.16 with patches or newer version of Radiator. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf) under section <AuthBy RADSEC>.

### 3.1.14. SupportedVendorIds

---

This is an optional parameter, which defines the supported vendor IDs announced in [CER](#) and [CEA](#) messages. This has no default value and the supported vendor ID is not announced by default. The default dictionary or the configured dictionary file consist an alias group *DictVendors* for all supported vendors.

#### Example

```
# Advertise Open System Consultants and 3GPP
SupportedVendorIds 9048, 3GPP
```

### 3.1.15. AcctApplicationIds

---

This is an optional parameter, which defines the *Acct-Application-Id* attributes announced in the [CER](#) and [CEA](#) messages. The *Acct-Application-Id* is not announced by default.

#### Example

```
AcctApplicationIds Base Accounting
```

### 3.1.16. VendorAuthApplicationIds

---

This is an optional parameter, which defines the authentication *Vendor-Specific-Application-Id* attributes announced in the [CER](#) and [CEA](#) messages. The *Vendor-Specific-Application-Id* is not announced by default. The parameter value is a comma-separated list of **vendor:application** values. Both names and direct numeric values are accepted.

#### Example

```
VendorAuthApplicationIds 3GPP:3GPP-Rx, 3GPP:3GPP-Gx
```

### 3.1.17. VendorAcctApplicationIds

---

This is an optional parameter, which defines the accounting *Vendor-Specific-Application-Id* attributes announced in the [CER](#) and [CEA](#) messages. The *Vendor-Specific-Application-Id* is not announced by default. The parameter value is a comma-separated list of **vendor:application** values. Both names and direct numeric values are accepted.

#### Example

```
VendorAcctApplicationIds OSC:Example accounting app
```

### 3.1.18. Peer

---

This parameter defines the name or IP address of the Diameter peer. Both IPv4 and IPv6 addresses are supported. This parameter is required when `<DiaPeerDef>` is configured to act as an initiator.

### 3.1.19. Port

---

This is an optional parameter, which defines the network port `<ServerDIAMETERTelco>` listens to for connections from Diameter peers. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf) under section `<ServerDIAMETER>`.

### 3.1.20. Protocol

---

This is an optional parameter, which allows choosing transport layer protocol, TCP or SCTP, for carrying Diameter messages. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf) under section `<ServerDIAMETER>`.

### 3.1.21. TLS\_\*

---

These parameters enable and configure of TLS (Transport Layer Security) authentication and encryption. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf) under section "TLS configuration". To enable TLS, you need to define `TLS_Protocols` configuration parameter with the other TLS related parameters, such as certificates, that depend on your operating environment.

#### Note

Old configuration parameters `UseTLS` and `UseSSL` are obsolete and should not be used. Use `TLS_Protocols` instead.

## 4. Configuring DIAMETER server

---

A `<ServerDIAMETERTelco>` clause is required to create a listen socket for the incoming Diameter peer connections.

### 4.1. <ServerDIAMETERTelco>

---

This section describes the configuring parameters of `<ServerDIAMETERTelco>`.

#### 4.1.1. Peer

---

This parameter defines the name or IP address of the Diameter peer. Both IPv4 and IPv6 addresses are supported. This parameter is required when `<DiaPeerDef>` is configured to act as an initiator.

#### 4.1.2. Port

---

This is an optional parameter, which defines the network port `<ServerDIAMETERTelco>` listens to for connections from Diameter peers. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf) under section `<ServerDIAMETER>`.

#### 4.1.3. BindAddress

---

This is an optional parameter, which defines one or more network interface addresses that are listened to for incoming Diameter connections. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf) under section `<ServerDIAMETER>`.



#### 4.1.4. MaxBufferSize

---

This is an optional parameter, which defines the maximum number of octets buffered in output. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf) under section <ServerDIAMETER>.

#### 4.1.5. Protocol

---

This is an optional parameter, which allows choosing transport layer protocol, TCP or SCTP, for carrying Diameter messages. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf) under section <ServerDIAMETER>.

#### 4.1.6. ReadTimeOut

---

This is an optional parameter, which defines the maximum time, in seconds, to wait for incoming Diameter connection to complete the initial handshaking. The default value is 10. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf) under section <ServerDIAMETER>.

#### 4.1.7. TLS\_\*

---

These parameters enable and configure of TLS authentication and encryption. For more information, see [Radiator reference manual \[https://www.open.com.au/radiator/ref.pdf\]](https://www.open.com.au/radiator/ref.pdf) under section "TLS configuration". To enable TLS, you need to define *TLS\_Protocols* configuration parameter with the other TLS related parameters, such as certificates, that depend on your operating environment.

##### Note

Old configuration parameters *UseTLS* and *UseSSL* are obsolete and should not be used. Use *TLS\_Protocols* instead.

## 5. Configuring Diameter relay

---

Radiator supports Diameter relay functionality with `Auth DiaRelay` clause. One or more Diameter relays can be supported by a single Radiator instance. The Diameter relays are independent from each other. This allows functionality similar to IP VRF (Virtual Routing and Forwarding) where multiple segregated relay `Auth DiaRelay` clauses can be active simultaneous.

### 5.1. <AuthBy DiaRelay>

---

This section describes the configuration parameters of <AuthBy DiaRelay>.

#### 5.1.1. Identifier

---

This is an optional parameter, which defines the name of the specific <DiaPeerDef> clause and its configuration.

#### 5.1.2. DiaPeerDef

---

This parameter defines the Diameter Peer the Radiator instance connects to.

#### Example

```
# Relay the requests to peer defined by DiaPeerDef with
# Identifier osc-pcrf
DiaPeerDef osc-pcrf
```

## 6. Configuring <MessageLog FILECARRIER>

---

This section describes the configuring parameters of <MessageLog FILECARRIER>.

### 6.1. Filename

---

This string defines the file name into which the log statistics are saved. The default value is %L/messageLog. The file name can include special formatting characters.

### 6.2. Format

---

This enumeration is an optional parameter, which defines the file output format. The possible values are **text**, **libpcap**, and **text2pcap**. The default value is **text** and it is also applied when the value is not defined.

## 7. Configuring EIR

---

This section describes how to configure **EIR** parameters.

The **EIR** is a database that contains information on mobile devices that are banned from using the network or need to be tracked for some purpose. The devices are listed by their **IMEI (International Mobile Equipment Identity)**.

### 7.1. <AuthBy DiaEIR>

---

This section describes the configuring parameters of <AuthBy DiaEIR>.

<AuthBy DiaEIR> queries **IMEI** status from **EIR** using Diameter S13/S13' interface. It can also query the software version and **IMSI (International mobile subscriber identity)** status. The result from **EIR** determines if the request is accepted or rejected.

Radiator Carrier Module distribution package contains an example configuration file `goodies/eir-client.cfg`.

#### 7.1.1. DiaEIR

---

This object list enables **EIR** check and identifies the used *DiaEIR* clause. This has no default value but it must be set.

#### 7.1.2. MakeAnswer

---

When *MakeAnswer* is set, a simple Diameter answer with either **DIAMETER\_SUCCESS** or **DIAMETER\_UNABLE\_TO\_COMPLY** is sent if <AuthBy DiaEIR> does not return ignore. This parameter is not set by default.

#### 7.1.3. EIR\_UnknownAction

---

*EIR\_UnknownAction* defines the return value for <AuthBy DiaEIR> if the **EIR** request gets **DIAMETER\_UNKNOWN\_EQUIPMENT**. The value can be either **accept** or **reject**, **accept** is the default value.

#### 7.1.4. EIR\_AttributesHook

---

This parameter is a hook that allows customising how to set **IMEI** and other values are passed to **EIR**. This has not any default value.

When this is set, *IMEIAttribute*, *IMSIAttribute*, and *SoftwareVersionAttribute* are ignored.

Here is an example that shows how to get the values from current request attributes:

```
EIR_AttributesHook sub
{ my $p = $_[0]; my $imei = $_[1]; my $sv = $_[2]; my $imsi = $_[3]; \
  $$imei = $p->get_attr('X-OSC-SIM-IMEI'); \
  $$sv    = $p->get_attr('X-OSC-SIM-Software-Version'); \
  $$imsi  = $p->get_attr('X-OSC-SIM-IMSI'); }
```

---

### 7.1.5. IMEIAttribute

This parameter defines the IMEI attribute in the current request that must have a value for **IMEI**. This is ignored when *EIR\_AttributesHook* is defined. The default value is **OSC-SIM-IMEI**.

---

### 7.1.6. SoftwareVersionAttribute

This parameter defines the software version attribute in the current request that must have a value for software version. This is ignored when *EIR\_AttributesHook* is defined. The default value is **OSC-SIM-Software-Version**.

---

### 7.1.7. IMSIAttribute

This parameter defines the IMSI attribute in the current request that must have a value for **IMSI**. This is ignored when *EIR\_AttributesHook* is defined. The default value is **OSC-SIM-IMSI**.

---

## 7.2. <DiaEIR>

This section describes the configuring parameters of <DiaEIR>. <DiaEIR> implements the interface for querying **EIR**.

---

### 7.2.1. Identifier

This parameter defines the name of the specific **EIR** clause in the configuration. This must be defined, otherwise you cannot refer to this **EIR** clause.

---

### 7.2.2. DiaPeerDef

This parameter defines the Diameter Peer which the this clause connects to.

---

### 7.2.3. EIRCache

*EIRCache* is Identifier of the EIRCache clause. If this is not set, no caching is done. This is not set by default.

---

## 7.3. <EIRCacheInternal>

This section describes the configuring parameters of <EIRCacheInternal>. <EIRCacheInternal> is an optional module for caching **EIR** responses.

---

### 7.3.1. Identifier

This parameter defines the name of the specific **EIR** clause in the configuration. This must be defined, otherwise you cannot refer to this **EIR** clause.

---

### 7.3.2. CacheTimeout

*CacheTimeout* defines (in seconds) for how long the successful **EIR** responses are cached. The default value is **1800** (30 minutes).

### 7.3.3. NegativeCacheTimeout

If **EIR** cannot be connected or it returns an answer that cannot be successfully processed, *NegativeCacheTimeout* defines the time (in seconds) for how long time the answer is cached. Using this feature gives **EIR** time to recover from the possible error condition. The default value is **300** (5 minutes).

## 7.4. <ServerDiaEIR>

This section describes the configuring parameters of <ServerDiaEIR>. Apart from the parameters listed here, <ServerDiaEIR> inherits other parameters from <ServerDIAMETER>. <ServerDIAMETER> is documented in Radiator reference manual [<https://www.open.com.au/radiator/ref.pdf>].

Radiator Carrier Module distribution package contains an example configuration file `goodies/eir-server.cfg`. The test **IMEI**s are currently listed in `ServerEIR.pm`. Different test **IMEI**s trigger different responses, including errors, from this example **EIR** server. You can add your test device's **IMEI** into `ServerEIR.pm`. Later it will be possible to create a separate configuration file for <ServerDiaEIR> that contains the **IMEI** list.

### 7.4.1. VendorAuthApplicationIds

*VendorAuthApplicationIds* is an optional parameter that defines the Vendor-Specific-Application-Ids announced in **CEA**. The default value is `s13/s13'`.

## 8. Configuring <ServerDHCP>

This section describes the configuration parameters of <ServerDHCP>. <ServerDHCP> handles **DHCP** (Dynamic Host Configuration Protocol) requests by converting them to RADIUS requests. The converted RADIUS requests can be used for authentication and dynamic address allocation.

To serve **DHCP** requests, Radiator must be able to bind to **DHCP** server port 67. This typically requires that Radiator is run as root. Because **DHCP** uses fixed port numbers 67 and 68, there cannot be other **DHCP** services or Radiator instances configured with <AddressAllocator DHCP> or <ServerDHCP> on the same host, unless separate bind IP addresses are available.

**DHCP** options in Radiator configuration use the names defined by IANA. For example, **DHCP** option 51 that is typically known as "lease time" or "IP Address Lease Time" is called "Address Time" in Radiator configuration. For a configuration example, see `goodies/server-dhcp.cfg`.

### 8.1. UsernameOption

This string parameter defines the name of the **DHCP** option that is used as a value for User-Name in the request dispatched to *Handler*. The default value is `Hostname`.

### 8.2. DefaultUsername

This string parameter defines the User-Name that is used in requests dispatched to *Handler* if *UsernameOption* does not define this option in the **DHCP** request. The default value is `Unknown-DHCP-User`.

### 8.3. DHCPyiaddrAttr

This string defines the attribute name in RADIUS reply for *yiaddr* in **DHCP** replies. The default value is `Framed-IP-Address`.

## 8.4. DHCPSubnetMaskAttr

---

This string defines the attribute name in RADIUS reply for Subnet Mask option in **DHCP** replies. If this is left empty, *DefaultDHCPSubnetMask* is used instead. The default value is **Framed-IP-Netmask**.

## 8.5. DefaultDHCPSubnetMask

---

This is a string parameter. If *DHCPSubnetMask* has no value, this is used instead. Special formatting characters are supported. This has no default value.

## 8.6. DHCPRouterAttr

---

This string defines the attribute name in RADIUS reply for Router option in **DHCP** replies. All instances in the reply are added. This has no default value.

## 8.7. DHCPDomainServerAttr

---

This string defines the attribute name in RADIUS reply for Domain Server option in **DHCP** replies. All instances in the reply are added. This has no default value.

## 8.8. DHCPAddressTimeAttr

---

This string defines the attribute name in RADIUS reply for Address Time, also known as lease time, option in **DHCP** replies. The default value is **Session-Timeout**.

## 8.9. DefaultDHCPAddressTime

---

This is an integer parameter. If *DHCPAddressTime* has no value, this parameter is used instead. Special formatting characters are supported. The default value is **86400**.

## 8.10. DHCPClientIdentifier

---

This string defines the value used for Client Id option in **DHCP** replies. Special formatting characters are supported. The default value is **%{User-Name}**.

## 9. <AuthBy DiaINTERNAL>

---

This section describes how to configure *<AuthBy DiaINTERNAL>* module.

*<AuthBy DiaINTERNAL>* provides similar functionality to Radiator's *<AuthBy INTERNAL>*. Radiator Carrier Module distribution package contains an example configuration file *goodies/dia-internal.cfg*.

Here is an example of using *<AuthBy DiaINTERNAL>*:

```
<AuthBy DiaINTERNAL>
  Identifier authby-dia-internal

  # DefaultResult defaults to DIAMETER_UNABLE_TO_COMPLY. Other
  # results are not set by default.

  #AuthResult DIAMETER_SUCCESS
  #AcctResult DIAMETER_SUCCESS
  #DefaultResult DIAMETER_SUCCESS
</AuthBy>
```

## 9.1. DefaultResult

This string parameter defines the Diameter result to use if no request specific result code is specified. The default value is `DIAMETER_UNABLE_TO_COMPLY`.

## 9.2. AuthResult

This string defines the Diameter result that is used for NASREQ Authentication requests. This is not set by default.

## 9.3. AcctResult

This string defines the Diameter result that is used for NASREQ Accounting requests. This is not set by default.

# 10. Using VSA framework for customised attributes

This section describes how to enable advanced attribute encoding and decoding with Radiator's [VSA \(Vendor-Specific Attributes\)](#) framework.

Radiator's [VSA](#) framework supports creating vendor-specific modules for encoding and decoding attributes that have non-standard formats. The attribute type for these attributes is set to `custom` in Radiator's dictionary.

At this moment, Radiator Carrier Module includes a customised dictionary file, `dictionary.custom_vsa`, and 2 vendor-specific modules:

- `Vendor_10415.pm`

This module contains the routines for customised 3GPP VSAs.

- `Vendor_40808.pm`

This module contains the routines for customised Wi-Fi Alliance VSAs.

The customised dictionary file, `dictionary.custom_vsa`, redefines some attributes present in the default dictionary file. The redefined attributes are passed the included vendor-specific modules.

Here is an example of decoding attribute `3GPP-GPRS-QoS-Profile` when `dictionary.custom_vsa` is first disabled and then enabled:

```
Wed Dec 13 17:48:50 2017: DEBUG: Packet dump:
*** Received from 127.0.0.1 port 59458 ....
Code:      Access-Request
Identifier: 193
Authentic: <230>\<232><168><1><151><191>/OZ<171>k<203><164><199><206>
Attributes:
    User-Name = "mikem"
    Service-Type = Framed-User
    NAS-IP-Address = 203.63.154.1
    NAS-Identifier = "203.63.154.1"
    NAS-Port = 1234
    Called-Station-Id = "123456789"
    Calling-Station-Id = "987654321"
    NAS-Port-Type = Async
    User-Password = o<244><24><21><12>-<191>v<233><217>o<6><165>0<137><230>
    3GPP-GPRS-QoS-Profile = "99-23731f9301858574597878"
```

```

Wed Dec 13 17:51:27 2017: DEBUG: Packet dump:
*** Received from 127.0.0.1 port 60790 ....
Code:      Access-Request
Identifier: 85
Authentic: {<152><151>~<149>Z<157>@w<250><146>B<7><218><253><234>
Attributes:
    User-Name = "mikem"
    Service-Type = Framed-User
    NAS-IP-Address = 203.63.154.1
    NAS-Identifier = "203.63.154.1"
    NAS-Port = 1234
    Called-Station-Id = "123456789"
    Calling-Station-Id = "987654321"
    NAS-Port-Type = Async
    User-Password = <187><166><234><164>Q<150>bu<132><3>c<0><16>02<175>
    3GPP-GPRS-QoS-Profile = 99-23731f9301858574597878
    OSC-3GPP-GPRS-Release-Indicator = 99
    OSC-3GPP-GPRS-Peak-Throughput-Class = Up-to-64kBps
    OSC-3GPP-GPRS-Mean-Throughput-Class = Best-Effort-Mean-Throughput
    OSC-3GPP-GPRS-Traffic-Class = Background-Class
    OSC-3GPP-GPRS-Max-Uplink = 896
    OSC-3GPP-GPRS-Guaranteed-Uplink = 512
    OSC-3GPP-GPRS-Max-Downlink = 896
    OSC-3GPP-GPRS-Guaranteed-Downlink = 512

```

## 11. Abbreviations

---

### Capabilities Exchange Answer

CEA (Capabilities Exchange Answer)

Acronym: **CEA**

### Capabilities Exchange Request

CER (Capabilities Exchange Request)

Acronym: **CER**

### Dynamic Host Configuration Protocol

DHCP (Dynamic Host Configuration Protocol)

Acronym: **DHCP**

### Evolved Packet Data Gateway

ePDG (Evolved Packet Data Gateway)

Acronym: **ePDG**

### Equipment Identity Register

EIR (Equipment Identity Register)

Acronym: **EIR**

### Home Location Register

HLR (Home Location Register)

Acronym: **HLR**

**Home Subscriber Server**

HSS (Home Subscriber Server)

Acronym: **HSS**

**International Mobile Equipment Identity**

IMEI (International Mobile Equipment Identity)

Acronym: **IMEI**

**International mobile subscriber identity**

IMSI (International mobile subscriber identity)

Acronym: **IMSI**

**Transport Layer Security**

TLS (Transport Layer Security)

Acronym: **TLS**

**Virtual Routing and Forwarding**

VRF (Virtual Routing and Forwarding)

Acronym: **VRF**

**Vendor-Specific Attributes**

VSA (Vendor-Specific Attributes)

Acronym: **VSA**